

Avionics

ATB-7300

Avionics Test Bench



CONFIGURABLE PXI PLATFORM FOR AVIONICS TEST

Multi-system test capability in stand-alone instrument or system ATE configurations

Standard Features

- Tests ILS / VOR / MKR / ADF and VHF COMM functions, including SELCAL
- Large touch screen color display
- Fully compatible with Aeroflex NAV-2000R and Collins 479S-6A GPIB command sets

Optional Features

- 250 KHz to 3 GHz spectrum analyzer with custom analysis tools for avionics RF applications
- 406 MHz COSPAS / SARSAT Beacon (ELT) test
- VHF Comm TX and DME TX analyzer

ATB-7300

ATB-7300 Avionics Test Bench is a comprehensive, configurable test platform for avionics system and component test. Applications include R&D, manufacturing, troubleshooting and return to service testing. The ATB-7300 offers unparalleled flexibility for OEMs and repair shops to adapt to their own unique needs.



NAV/COMM Generator GUI

General – Each generator resource panel provides control of generator frequency, RF level, RF output and modulation. The GUI help files show the operator how to use each GUI for instrument control. Fly-out tool bars are used to select functional modes.



VHF Gen – Provides control of modulation frequency, modulation depth (up to 3 sources), SELCAL tones, frequency and tone sequences.




VDB Gen – Allows user to generate and transmit a valid VHF data broadcast data packet from a source data file, compliant with RTCA and ARINC specifications.




ILS / LOC Gen – Provides control of 90 Hz and 150 Hz tone frequencies, modulation depths, left/right DDM and ident settings, including Morse code.




VOR Gen – Provides control of 30 Hz Var / Ref and 9960 Hz tone frequencies, modulation depths, 9960 Hz deviation, VOR bearing, to/from and ident settings.

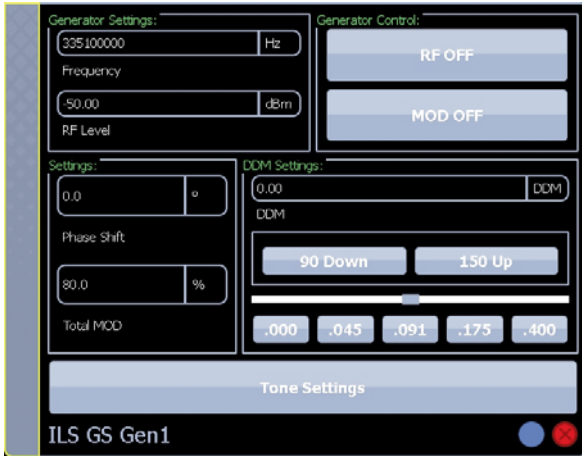

ILS Glide Slope Gen – Provides control of 90 Hz and 150 Hz tone frequencies, modulation depths, up/down DDM.

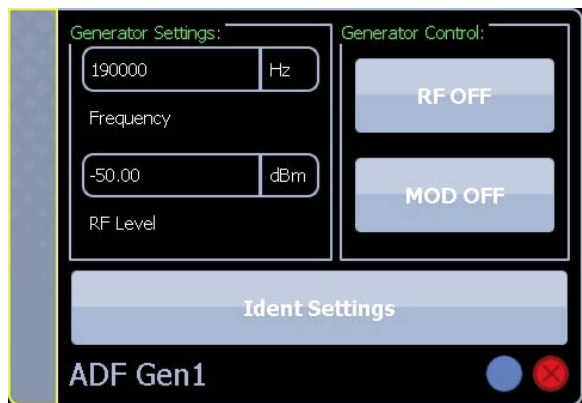

ADF Gen – Provides control of modulation frequency, modulation depth and ident settings.

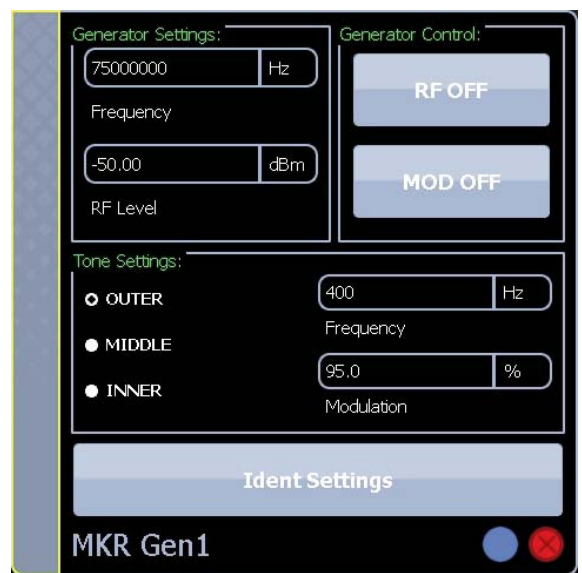

MKR Gen – Provides selection of Outer, Middle and Inner marker beacon tones and control of tone frequencies, modulation depth and ident settings.

SPECIFICATIONS

SIGNAL GENERATOR

Frequency Range

100 KHz to 3000 MHz

1 Hz resolution

RF Level

GEN Port

-120 dBm to +10 dBm

0.01 dB increments

T/R Port

-30 dBm to -120 dBm

0.01 dB increments

Accuracy

GEN Port

±1.5 dB (> -110 dBm)

±3.0 dB (<= -110 dBm)

T/R Port

±1.5 dB (> -120 dBm)

±3.0 dB (<= -120 dBm)

Spurious

Phase Noise

-105 dBc/Hz @ 20 kHz offset

Harmonics

<-25 dBc

Non-Harmonics

<-50 dBc

ADF GENERATOR

Frequency

Range

Per signal generator specifications

Functional

100.000 kHz to 1.750 MHz

Resolution

1 Hz

Default

190.000 kHz

RF Level

GEN Port

-120 dBm to +10 dBm

0.01 dB increments

T/R Port

-30 dBm to -120 dBm

0.01 dB increments

Default

-50 dBm

Modulation

See *IDENT SPECIFIC DATA*

MKR GENERATOR

Frequency

Range

Per signal generator specifications

Functional

75.000 MHz

Resolution

1 Hz

Default

75.000 MHz

RF Level

GEN Port

-120 dBm to +10 dBm

0.01 dB increments

T/R Port

-30 dBm to -120 dBm

0.01 dB increments

Default

-50 dBm

Tone Settings

Frequency

Range

30 Hz to 7400 Hz

Resolution

1 Hz

Default

Outer

400 Hz

Middle

1.300 kHz

Inner

3.000 kHz

% Modulation

Range

0-99%

Resolution

1%

Default

95%

IDENT

OUTER

Dot Time

0 ms, fixed

Gap Time

Range

50 ms to 250 ms

Resolution

1 ms

Default

125 ms

Dash Time

Range

150 ms to 750 ms

Resolution

1 ms

Default

375 ms

MIDDLE

Dot Time

125 ms, fixed

Gap Time

125 ms, fixed

Dash Time

375 ms, fixed

INNER

Dot Time

83 ms, fixed

Gap Time

83 ms, fixed

Dash Time

0 ms, fixed

ILS GENERATOR

Frequency

Range

Per signal generator specifications

Functional (GS)

329.150 MHz to 335.000 MHz

Functional (LOC)

108.100 MHz to 111.950 MHz

Resolution

1 Hz

Default (GS)

335.100 MHz

Default (LOC)

108.100 MHz

RF Level

GEN Port

-120 dBm to +10 dBm

0.01 dB increments

T/R Port

-30 dBm to -120 dBm

0.01 dB increments

Default

-50 dBm

Settings

Phase Shift

Range

0.0 to 359.9°

Resolution

0.1°

Default

0.0°

Total MOD

Not to exceed 99%

LOC includes 1020 Hz IDENT modulation

See *IDENT SPECIFIC DATA*

DDM Settings**Range****(Glideslope)**

0.000 to 0.800 DDM

(Localizer)

0.000 to 0.400 DDM

Resolution

0.001 DDM

Default

0.000 DDM

Total System Error**(Glideslope)**

±0.001 DDM from 0.000 to 0.045 DDM

±2% from 0.045 to 0.400 DDM

(Localizer)

±0.001 DDM from 0.000 to 0.045 DDM

±2% from 0.045 to 0.200 DDM

Glideslope and Localizer Tone Settings**Frequency****Range**

90 Hz 72 Hz to 108 Hz

150 Hz 120 Hz to 180 Hz

Resolution

1 Hz

Accuracy

±0.01%

Distortion

<0.40% THD

Modulation

90 and 150 Hz Total modulation not to exceed 99%

Default

20%

Overall Accuracy

±2% of setting for 5% to 90% AM

Tone Distortion

0.5% maximum

VOR GENERATOR**Frequency****Range**

Per signal generator specifications

Functional

108.000 MHz to 117.950 MHz

Resolution

1 Hz

Default

108.00 MHz

RF Level**GEN Port**

-120 dBm to +10 dBm

0.01 dB increments

T/R Port

-30 dBm to -120 dBm

0.01 dB increments

Default

-50 dBm

Settings

Total MOD Not to exceed 99%

Direction**Bearing****Range**

000.0° to 359.9°

Resolution

0.1°

Radial Accuracy

±0.05°

Tone Settings**Frequencies**

30 VAR and 30 REF Freq

Range

20 Hz to 40 Hz

Resolution

1 Hz

Default

30 Hz

9960 Frequency**Range**

9000 Hz to 11000 Hz

Resolution

1 Hz

Default

9960 Hz

Frequency Deviation**Range**

240 Hz to 540 Hz

Resolution

1 Hz

Default

480 Hz

Accuracy

±0.01%

Distortion

<0.40% THD

Modulation

30 VAR and 9960 MOD

Range

Total % mod not to exceed 99%

Includes 1020 Hz IDENT modulation

See *IDENT SPECIFIC DATA*

Default

30%

Overall Accuracy

±2% of setting for 5% to 90% AM

Tone Distortion

0.5% max

***IDENT (ADF, ILS LOC AND VOR)**

IDENT Code

Valid Characters

A-Z, 0-9

Length

1 to 5 characters

Default

IDENT

Word Rate

Range

1 sec. to 65 sec.

Default

10 sec.

Resolution

1 sec.

Frequency

Range

10 Hz to 18000 Hz

Resolution

1 Hz

Default

1020 Hz

Accuracy

±0.01%

Distortion

<0.40% THD

Modulation

Range

Total % MOD not to exceed 99%

Resolution

0.01%

Default

0.00%

Overall Accuracy

±2% of setting for 5% to 90% AM

Tone Distortion

0.5% max

Dot Time

Range

50 ms to 250 ms

Default

150 ms

Resolution

1 ms

Gap (Dot/Dash) Time

Range

50 ms to 250 ms

Default

150 ms

Resolution

1 ms

Dash Time

Range

150 ms to 750 ms

Default

450 ms

Resolution

1 ms

Character Spacing

Range

150 ms to 750 ms

Default

450 ms

Resolution

1 ms

VHF DATA BROADCAST (VDB) GENERATOR

Frequency

Range

Per signal generator specifications

Functional

108.000 MHz to 117.950 MHz

Resolution

1 Hz

Default

108.00 MHz

RF Level

GEN Port

-120 dBm to +10 dBm

0.01 dB increments

T/R Port

-30 dBm to -120 dBm

0.01 dB increments

Default

-50 dBm

MODES

Single-File

File Play Mode

Continuous or from 1 to 4095 times

Play-List

List Play Mode

Continuous or from 1 to 4095 times

List Entries

1 to 127

Plays Per Entry

1 to 4095

Generate File (VDB Burst)**Input Data**

From a file or array

Filter ALPHA

0.0 to 1.0

Oversample Factor

2 to 16

RF Ramp Filter

Adjustable length cosine response

Distortion

<0.40% THD

FM Mode**Modulation****Rate**

1 kHz to 50 kHz

Deviation

30 Hz to 500 kHz

Resolution

1 Hz to 1 kHz, 10 Hz above 1 kHz

Accuracy

±3.0%

Single-File Mode**File Play Mode**

Continuous or from 1 to 4095 times

Play-List Mode**List Play Mode**

Continuous or from 1 to 4095 times

List Entries

1 to 127

Plays Per Entry

1 to 4095

SELCAL Mode

User selectable tone set with programmable tone periods.

SELCAL Settings**P1 and P2 Codes****Range**

2 characters

Valid Characters

A through H, J through M, P through S

P1 and P2 Tones**Frequencies****Range**

Set from code,

312.6 Hz to 1479.1Hz

Pulse MOD**Range**

0.00% to 99%

Applies to ALL pulses including test tone

Resolution

0.01%

Default

90.00%

Timing**P1 and P2 Time****Range**

0.000 to 2.000 sec.

Resolution

0.001 sec.

Default

1.000 sec.

VHF COMM GENERATOR**Frequency****Range**

Per signal generator specifications

Functional

116.000 MHz to 156 MHz

Resolution

1 Hz

Default

120.000 MHz

RF Level**GEN Port**

-120 dBm to +10 dBm

0.01 dB increments

T/R Port

-30 dBm to -120 dBm

0.01 dB increments

Default

-50 dBm

MODES**AM Mode****Modulation****Frequency Range**

(per Tone) 30 Hz to 18 kHz

Default

1000 Hz

Resolution

1 Hz

Accuracy

±1% from 10% to 90%

Range

Total % mod not to exceed 99%

Default (Per Tone)

30%

Overall Accuracy

±2% of setting for 5% to 90% AM

Gap Time

Range

0 to 999 ms

Resolution

1 ms

Default

200 ms

Test Tone

Frequency

Range

10 Hz to 18000 Hz

Resolution

1 ms

Default

1020 Hz

MOD

Range

0.00% to 99%,

Applies to ALL pulses including P1 and P2

Resolution

0.01%

Default

30.00%

Enable

ON (Checked) or OFF (Unchecked)

AM

0 to 99%

±3.0%

FM

10 to 500 kHz

±3.0%

DIGITIZER / RECEIVER

Installed as option ATB-ANL

Frequency Range

250 kHz to 3000 MHz 1 Hz Resolution

Frequency Measurement

As per frequency reference

RF Input Level

ANT Port: +30 dBm

T/R Port: +53 dBm Peak Power, > 50 W one minute duty cycle

Sensitivity

ANT Port: -100 dBm

T/R Port: -60 dBm

(>10 dB SINAD, FM, 1 kHz Rate, 6 kHz Deviation, 25 kHz BW, 300 Hz to 3.4 kHz AF Filter, Preamp OFF)

Residual Responses

< -95 dBm, typically -100 dBm with RF input terminated into 50 ohms and minimum RF and IF attenuation

Amplitude Measurement

ANT: -100 dBm to +30 dBm

T/R: -60 dBm to +50 dBm

Accuracy: ±1.0 dB

Modulation Measurement

AM

0 to 99% ±3.0%

FM

Deviation

100 Hz to 500 kHz

Rate

1 kHz to 50 kHz

Accuracy

±5%

ELT (EMERGENCY LOCATOR) ANALYSIS

Installed as option ATES-ELT.

The instrument will measure the following specified beacon characteristics:

- Carrier frequency
- Carrier power
- Carrier power 1ms before start of burst
- Bit rate
- Start time of transmission (90% power point, relative to returned samples)
- Duration of burst
- Duration of unmodulated carrier
- Modulation phase
- Modulation rise time, fall time
- Modulation symmetry

And will also provide:

- I/Q samples for examining time plots of modulation
- Spectrum from 406.0 to 406.1 MHz for evaluating spurious emissions
- All received bits, either 112 or 144 for short/long formats.
- Return bit fields broken into:
 - Protected data fields 1 and 2, BCH field 1 and 2, non-protected data field (short message has PDF-1, BCH-1, non-protected field; long message has PDF-1, BCH-1, PDF-2, BCH-2)
 - Provide calculated BCH-1, BCH-2 for comparison with received bits. (PDF-1 contains short/long flag and the 15-Hex ID number)
 - Decoded protocol information from the short/long format data, including:
 - Protocol used (e.g. ELT serial user protocol, ELT national location protocol)
 - Country
 - Type of auxiliary radio locator
 - Identification data (e.g. aircraft registration, 24-bit address, call sign, etc, depending on mode)

DME ANALYZER SPECIFIC DATA

Measurements

Trigger Type

Software or RF level triggered

Sweep Time

0.1 to 10.0 seconds

Percent Power

Adjustable within spectrum analysis span

Occupied Bandwidth

Measured Width Adjustable within spectrum analysis span

Percent Adjustable from 0% to 100%

Rise Time

Start Edge Trigger

0% to 100%, Default 10 %

Stop Edge Trigger

0% to 100%, Default 90%

Resolution

10 ns steps

Accuracy

±2% from 1.0 μ S to 4 μ S

Fall Time

Start Edge Trigger

0% to 100%, Default 90 %

Stop Edge Trigger

0% to 100%, Default 10%

Resolution

10 ns steps

Accuracy

±2% from 1.0 μ S to 4 μ S

Pulse Width

Trigger

0% to 100%, Default 50%

Range

20 ns to 2000 ns in 10 ns steps

Accuracy

±2% from 2.0 μ S to 5 μ S

Pulse Spacing

Trigger

0% to 100%, Default 50%

Range

20 ns to 5000 ns in 10 ns steps

Accuracy

±2% from 10 μ S to 40 μ S

VHF ANALYZER SPECIFIC DATA

Measurements

Trigger Type

Software or RF level triggered

Sweep Time

0.1 to 10.0 seconds

VDL

Symbol Clock

10000 Hz to 11000 Hz

Oversample Factor

2, 4, 8, 16, 32

Sync Pattern

Customizable from 0 (off) to 50 symbols

IQ Offset

Enabled or disabled (default)

Interpolation

Linear or cubic spline (default)

Symbol Power

Range measurable at any symbol in memory

EVM

Range configurable from 1 to number of symbols in memory

IQ Imbalance

Range configurable from 1 to the number of symbols in memory

IQ Offset

Range configurable from 1 to the number of symbols in memory

Symbol Decoding

Range to the end of the first detected data burst

ACP

Channel Spacing

0 Hz to 50000 Hz

Channel Bandwidth

1000 Hz to 50000 Hz

Number of Channels

Carrier, first lower, first upper

Analog Measurements

Percent Modulation

Number of Sweeps

1 to 20

Accuracy

±3%

SINAD

Number of Sweeps

1 to 20

Filter Type

Band-pass filter

C-Message

Distortion**Number of Sweeps**

1 to 20

GENERAL

Frequency/Time Reference**Aging**

001 ppm per day

01 ppm per year

Temperature stability typically better than ± 0.01 ppm

External Reference Input

10 dBm nominal

Temp Range**Operating**

0°C to +50°C

Storage

-20°C to +70°C

Warm-up (For Specified Accuracy)

10 minutes

Size

17.5" (44.5 cm) wide, 8" (20.3 cm) high, 24" (61 cm) deep

Weight

60 lbs. (27.2 kg)

USER INTERFACE

GPIB (IEEE-488)

ORDERING INFORMATION

When ordering, please include the Order Number listed below:

Order

Number	Description
87961	ATB-7300 Avionics Test Bench

Standard Accessories

29972	Power Cord
89304	Operations Manual (CD)
87666	Remote Communications Interface Manual (CD)

Options

89377	ATB-ANL OPT01, VHF/DME Signal Analyzer
89376	ATES-ELT OPT02 ELT 406 MHz Analysis

Note: Must order ATB-ANL OPT01 to support the ATES-ELT option.

For the very latest specifications visit www.aeroflex.com

CHINA Beijing

Tel: [+86] (10) 6539 1166
Fax: [+86] (10) 6539 1778

CHINA Shanghai

Tel: [+86] 21 2028 3588
Fax: [+86] 21 2028 3558

CHINA Shenzhen

Tel: [+86] (755) 3301 9358
Fax: [+86] (755) 3301 9356

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 89 99641 0
Fax: [+49] 89 99641 160

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] 80 [4] 115 4501
Fax: [+91] 80 [4] 115 4502

JAPAN

Tel: [+81] (3) 3500 5591
Fax: [+81] (3) 3500 5592

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SINGAPORE

Tel: [+65] 6873 0991
Fax: [+65] 6873 0992

TAIWAN

Tel: [+886] 2 2698 8058
Fax: [+886] 2 2698 8050

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2011.

www.aeroflex.com
info-test@eroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.