

# TP10-A429

COMPACT ARINC 429 READER / TRANSMITTER

P/N: 21630SI1

## **Suitable for major aeronautics equipment**

- Equipment monitoring, troubleshooting and simulation
- Enhanced data reading thanks to industrial value decoding
- Improved operational time with touch & user friendly interface
- Rechargeable battery to ensure up to eight hours operation
- Hand-held, ergonomic & rugged tool designed for harsh environment



ISO9001/EN9100/AS9100/JISQ9100

## TP10-A429

COMPACT ARINC 429 READER / TRANSMITTER  
P/N: 21630SI1

## FEATURES

- 1 Tx and 1 Rx ARINC 429 channels
- Encode/decode data into industrial values (Feet, Ft/Min, Kt, °C, etc.)
- Monitor and simulate up to 256 labels in real time
- Data recording for equipment monitoring and troubleshooting operations
- Integrated ARINC 429 database can be replaced by customized database

## CHARACTERISTICS

- 6,5 inch rugged touch screen panel
- 200x130x35 mm; 0,8 kg
- Operating: -20 to 55 °C
- Storage: -40 to 85 °C

## TOOLING SET

- Including TP10-A429 tablet, protective bumper, ARINC 429 harness (2.5 m with 2 mm banana plugs), battery charger, user manual, CoC & transportation case




**CONFIGURATION**  
Select data of interest



**MULTI-LABEL VIEW**  
Monitor and send up to 256 labels



**RX DETAILS**  
Check all ARINC429 key parameters

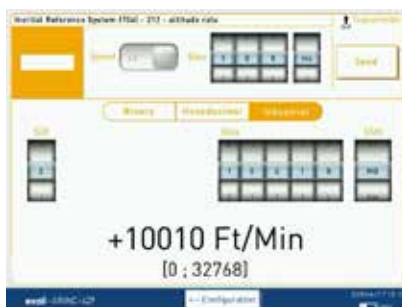

**TX DETAILS**  
Set up industrial values



**TP10-A429 TOOLING SET**

## HEAD OFFICE:

### Exail Aerospace SAS

ZAC de Saint Martin du Touch  
6 Impasse Alice Guy  
31300 Toulouse - FRANCE  
+33 5 62 11 17 17 | contact-aerospace@exail.com

[www.exail.com](http://www.exail.com)

**exail**