

To buy, sell, rent or trade-in this product please click on the link below:  
<https://www.avionteq.com/IFR-Aeroflex-8800SX-Digital-Radio-Test-Set>



[www.avionteq.com](http://www.avionteq.com)

**VIAVI**  
VIAVI Solutions



Brochure


**VIAVI**  
**8800SX**

Digital Radio Test Set

With its hybrid portable design, the industry's largest color touch-screen display, ruggedness, internal battery, power accuracy, advanced automated test and alignment, fast VSWR / Return Loss and Cable Fault measurements, the 8800SX offers RF professionals a superior experience in radio test

### At A Glance

- Dimensions: 34.3 cm x 29.3 cm x 14.6 cm
- Display Size: 30.5 cm (12 inches), diagonal
- Weight: 17 lbs (Base Unit)
- Battery: Internal, 2.5+ Hours Operation
- Rugged: 30 G Shock
- Test Range: -140 dBm to 57 dBm
- Technologies: P25, P25 Phase 2, DMR, NXDN™, TETRA, dPMR™, ARIB T98, FM, AM, DMR Repeater, PTC

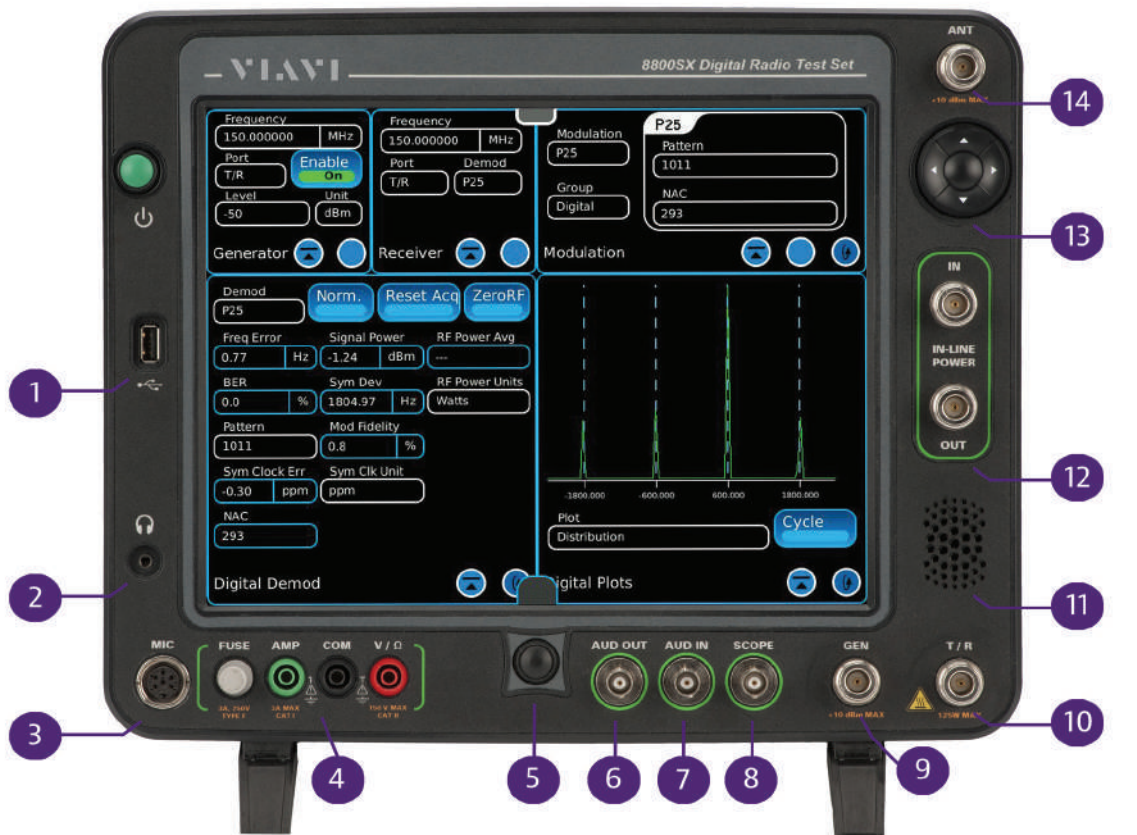

1. USB
2. Headphone Jack
3. Microphone Jack
4. Digital Multi-Meter
5. Home Key Control

6. Audio Out Port, BNC
7. Audio In Port, BNC
8. Oscilloscope Port, BNC
9. RF GEN Port, Type N
10. T/R Duplex Port, Type N

11. Internal Loudspeaker
12. Wideband Power Sensor  
(Included with Part Number 139942)
13. Arrow Controls
14. Antenna Port, Type N


## Hybrid Portable Design

The 8800SX combines the performance and features of a bench-level test set with the portability and ruggedness of a field-level instrument. Weighing only 17 lbs (7.71 kg), an internal battery with 2.5+ hours of operation, and rugged 30 G shock rating, test professionals will no longer compromise portability for critical test features. Advanced features ranging from automated test and alignment to digital modulation analysis plots to an internal 500 W (4% accuracy) in-line power meter are all available in a one-box solution.



## Unprecedented Display Size and Easy to Use Interface

The 8800SX is designed for maximum test efficiency. With the industry's largest display, ultra-fast store and recall "Presets", and its unique "Fast-Stack" user interface that allows test tiles to be stacked on one another and quickly accessed, test professionals can set up analog and digital tests in seconds and have instant access to more displayed meters and test functions.

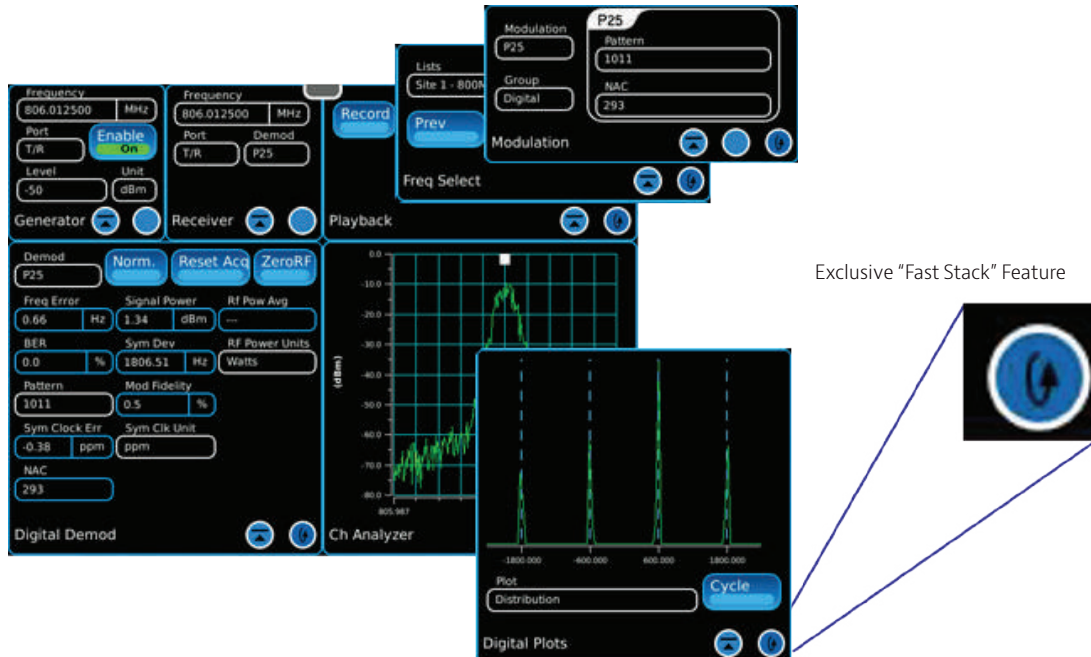

The 8800SX User Interface with "Fast Stack" Tile Access



## Complete Digital and Analog Test Suite


The global land mobile radio (LMR) market is rapidly transitioning from analog to digital. Therefore, test instrumentation must test both legacy analog systems as well as new emerging digital standards. The 8800SX is designed with advanced frequency, power, and modulation analysis instruments for both analog and digital systems.

### The 8800SX Technologies

- P25
- DMR
- TETRA
- AM
- ARIB T98
- P25 Phase 2
- NXDN
- dPMR
- FM
- Positive Train Control

### Analog Test Features:

- Audio Oscilloscope
- Channel Analyzer
- Dual Modulation Source
- Audio Function Generator
- Tone Remote/Two-Tone/Tone Sequential
- Meters
  - RF Error
  - RF Power
  - Frequency
  - SINAD
  - Distortion
  - Audio
  - Audio Level
  - Frequency
  - SNR
  - DMM

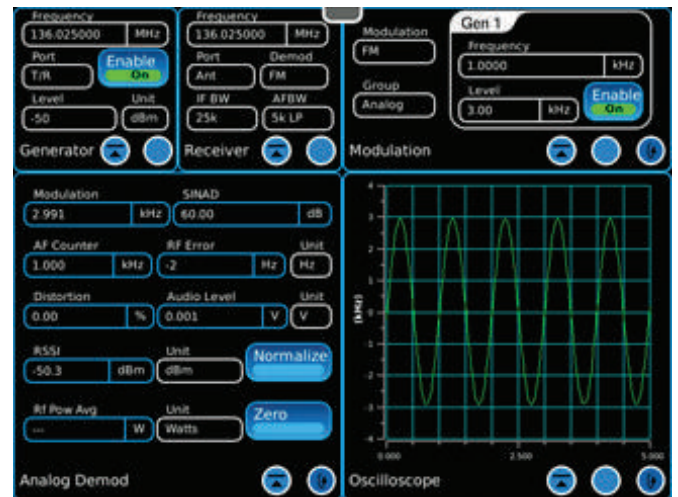


Example Analog Test Setup

### Expanded Channel Analyzer with Markers

The channel analyzer offers a unique expanded display mode, which dedicates the entire screen to the analyzer. Combining the expanded mode with the industry's largest color display provides test professionals with an easy-to-see spectrum display; regardless of the test distance.


The channel analyzer now sweeps approximate four times per second and offers up to six color markers for identifying signals and interference. An on-screen marker table provides users with instant frequency, level, and delta information on monitored signals.

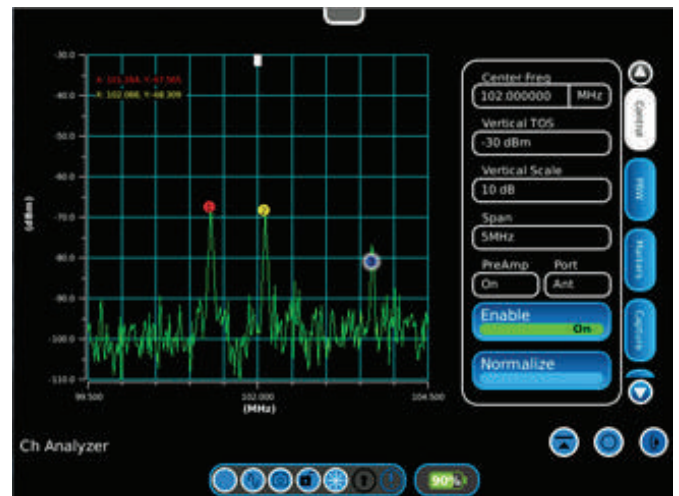


Channel Analyzer with Markers

## Digital Test Features

- Digital Test Patterns
- Distribution, Constellation, Eye Diagram Plots
- TDMA Burst Profile with Mask for DMR and P25 Phase 2
- Digital Voice Quality Verification
- Meters
  - Signal Power      – Slot Power
  - FSK Error          – Symbol Deviation
  - Magnitude        – Symbol Clock Error

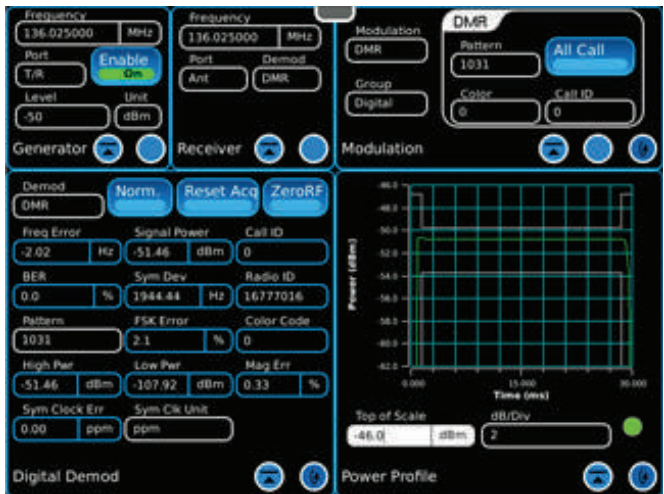


Example Digital Test Setup

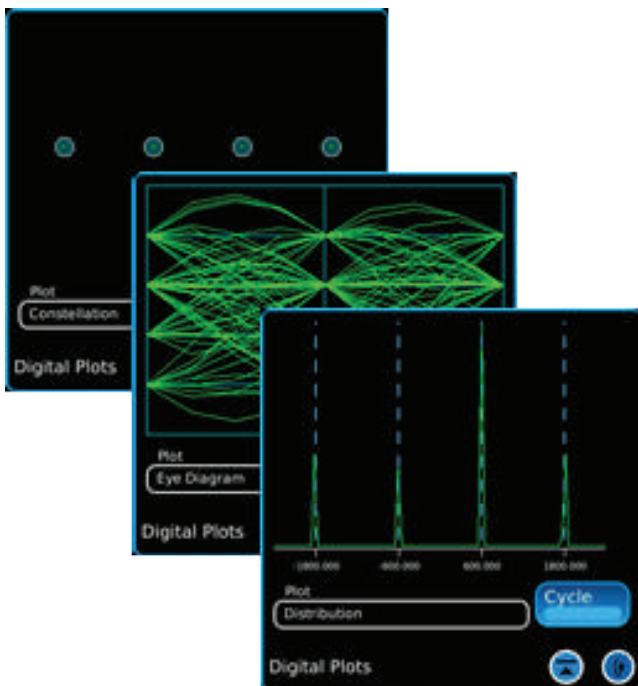

Modulation Analysis Plots

## DMR Burst Power Profile Plot

DMR is an ETSI standard with specific pass and fail parameters defined for the TDMA burst power in a slot. The Burst Power Profile plot on the 8800SX captures and displays the power profile of the burst in the active slot. Additionally, the 8800SX offers an exclusive pass and fail mask, defined with the ETSI standard's burst profile parameters, to visually indicate incorrect burst power. Proper bursts will display in green while burst errors will display in red.

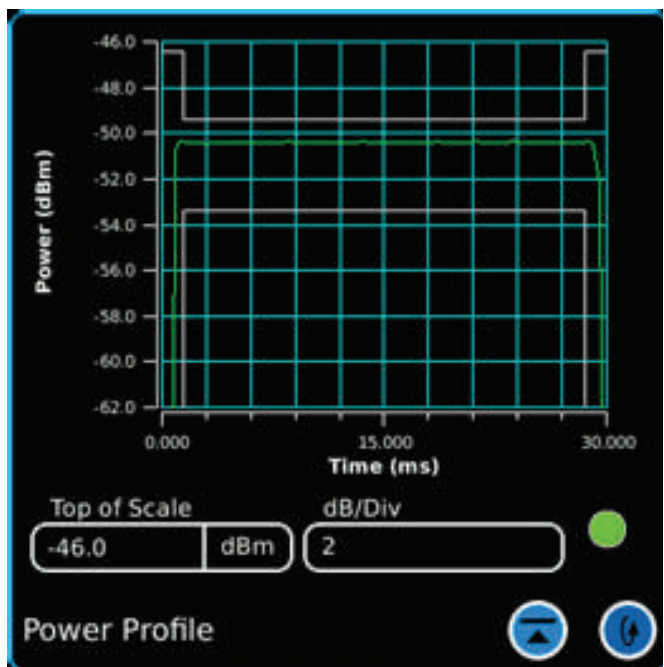

DMR Burst Profile Plot with Mask


# Advanced Digital

## DMR Repeater Testing

The DMR Repeater test mode automatically keys up DMR repeaters and transmits synchronously to the downlink signal. This greatly simplifies the task of testing the transmitter and receiver of a DMR repeater.

## P25 Phase 2 Analysis

P25 Phase 2, as part of the TIA/EIA-102 Technical Standard, provides analysis of the TDMA burst profile as well as tests specific to P25 Phase 2 modulation. The 8800SX provides analysis of the HDQPSK downlink and HCPM uplink modulation formats used in the Phase 2 standard.

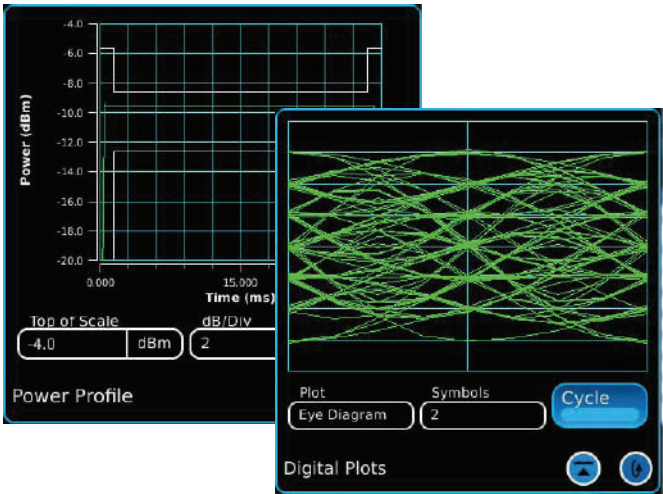


P25 Phase 2 Screen Shots

## TETRA Base Station Analysis

The 8800SX includes a cost effective way to measure the critical parameters for field-testing of TETRA base stations.

The transmitter testing for TETRA base stations includes RMS EVM (Error Vector Magnitude), Peak EVM, Residual Carrier, Frequency Error, and Signal Power.


Field-testing for TETRA receivers is also a feature of the TETRA Base Station Test. The ETSI TETRA standard defines the method for generating the TETRA BS T1 test signal, and by use of this signal, the user can measure the sensitivity of the TETRA base station receiver.

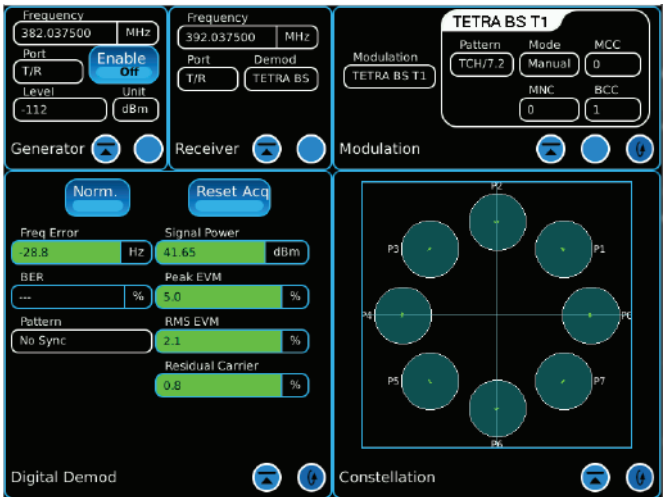

TETRA Base Station Test

## Positive Train Control Analysis

Recently enacted laws require that railroads provide remote monitoring and control of trains to ensure that the US railroad system provides the highest level of safety available. The 8800SX provides a Positive Train Control (PTC) option that allows Class 1 railroad operators the ability to test their radio control systems in the field or in the lab to ensure that the radio meets stringent PTC RF parameters.

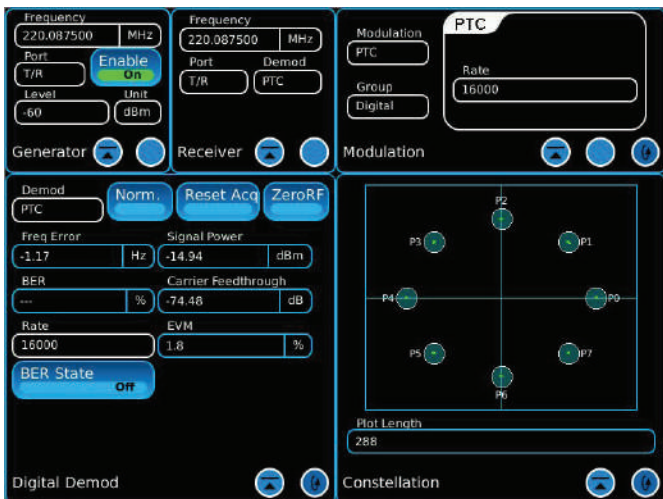

Positive Train Control Test (PTC)



## Color Meters

The 8800SX features color-coded meters for quick indication of pass and fail test results. Using the configuration tile, upper and lower limits for each meter can be set and saved by the user. Measurements that exceed the set limits will display “red” for values above the limit and “blue” for values below the limit. Now test professionals can perform fast “Go / No-Go” measurements simply by monitoring meter color indications.

## Frequency List

Land mobile radios are often tested at multiple frequencies, which requires the various transmit and receive frequencies to be set on the test instrument, which can be time consuming. The 8800SX frequency list feature provides a quick and easy way to test multiple frequencies. Frequency lists can be created using a configuration tool that allows users to:


- Create, Edit, and Store Frequency Lists
- Set 8800SX Generator and Receiver Frequencies and Generator Level
- Add CTCSS, DCS codes for Analog Testing
- Add NAC, Color Code, or RAN Code for Digital Testing

## Digital Voice Tests

The 8800SX provides digital voice quality testing with its unique Record and Playback feature for P25, DMR, dPMR, NXDN, and ARIB T98 radio systems. Users can record live voice from a radio under test, regardless of vocoder type, and play back the recording to the radio for audio quality verification. An “ideal” audio recording can be saved for each digital modulation type (P25, DMR, etc) allowing for fast play back and audio quality verification of the radio under test.



Meters with Color Pass/Fail Indicators

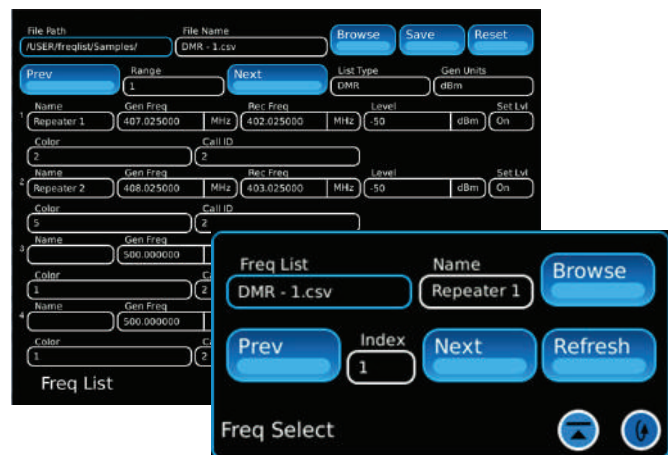

Frequency Select Control and Configuration Tiles



Record and Playback Tile for Voice Quality Testing

Quick Presets

The Presets feature allows for common analog and digital tests to be set up in seconds on the 8800SX. Three default presets and seven user-defined presets are included. A Preset saves open tiles, tile locations, modulation type, audio routing, and filter settings.



Presets Manager

Wideband Power Sensor

While the 8800SX features a power meter that will measure up to 125 Watts, a wideband power sensor is an especially useful test tool at remote repeater sites with high-power transmitters and cable antenna networks. Test professionals can measure true average and peak power, including VSWR and return loss.

The base configuration of the 8800SX (Part Number 142820) supports the use of an external wideband power sensor with 8800OPT13.


An alternate configuration of the 8800SX (Part Number 139942) comes with the wideband power sensor built-in so this valuable tool will not be forgotten.



In-Line Power Meter Tile

Wideband Analyzer

In addition to the full suite of field-level test instrumentation, the 8800SX features a 50 MHz Wideband Analyzer with six color markers. This powerful feature allows desired signals, interferences, and other spectrum anomalies to be viewed. Screen hold and capture features provide instant storage of screen images to be saved and exported to a PC for later analysis and documentation.

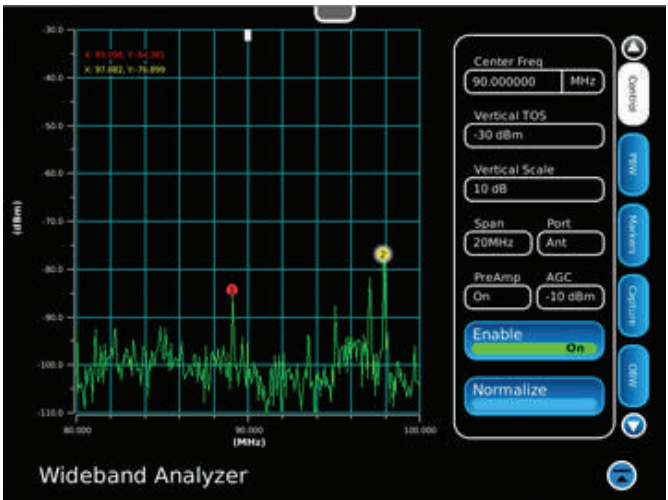


Wideband Analyzer with Color Markers



## Tracking Generator

RF professionals maintain antenna transmission networks and tune duplexers, in addition to radio tests. With the optional tracking generator (88XXOPT10) and Precision VSWR/DTF Kit (114348), the 8800SX provides a simple, fast tool for VSWR, Return Loss, Insertion Loss, and Distance to Fault measurements.

The 8800SX soft case permits complete operation of the test set while inside the case. It is also specifically designed with compartments for the return loss bridge and power divider, which allows for VSWR, Return Loss, and Distance-to-Fault measurements to be performed *in the case*. This exclusive feature test set up ensures that these important accessories are not forgotten.

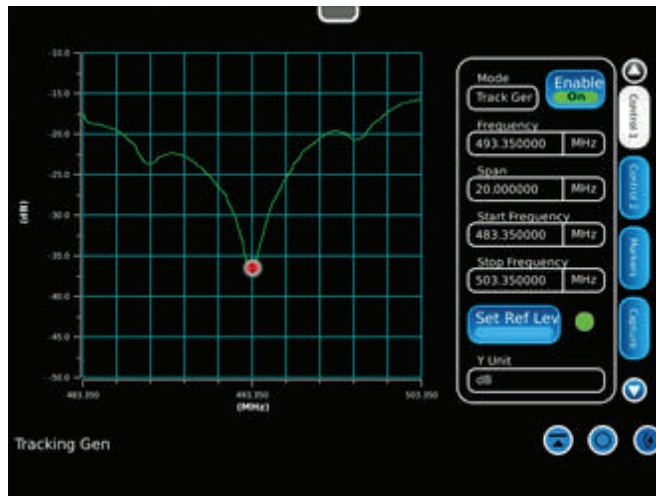

Tracking Generator with VSWR Measurement



The 8800SX in Soft Case with Return Loss Bridge Connected

# Auto-Test

The 8800SX is designed for complete automated radio test and alignment for analog and digital radios. Using the accurate instrumentation and high-speed remote command architecture, the 8800SX optimizes radio performance in minutes; with minimal human interaction.


Automated test and alignment applications are available for various radio manufacturers, including BK Technologies, EF Johnson Technologies, Hytera, JVCKENWOOD, L3Harris Technologies, Motorola Solutions, and Tait Communications. The complete list of supported radio families is provided in the options section.



The 8800SX Auto-Test Setup

Multiple automated test and alignment options can be installed on the 8800SX. Operators are only required to know the radio type, such as Motorola MOTOTRBO; not radio model number. The unique “Read Radio” feature queries the radio to gather the specific model number, and applies the specific test and alignment parameters for that model number as determined by the manufacturers. Specific tests and alignments can be selected and configured. Pressing “Run” enables the program and executes the selected tests.


The 8800SX also provides the required DMM with an optional Current Shunt for doing critical PA bias mobile radio power alignments.

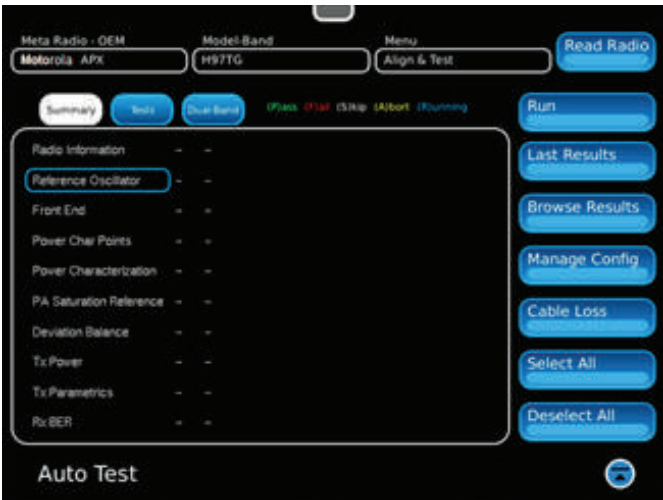

The 8800SX Auto-Test Summary Setup




The 8800SX provides a unique test result for each radio tested. The test result includes Date/Time, Radio Model Number, Serial Number, Firmware Version, and other information uniquely identifying the radio under test. It also includes the specific results of each test and alignment performed.

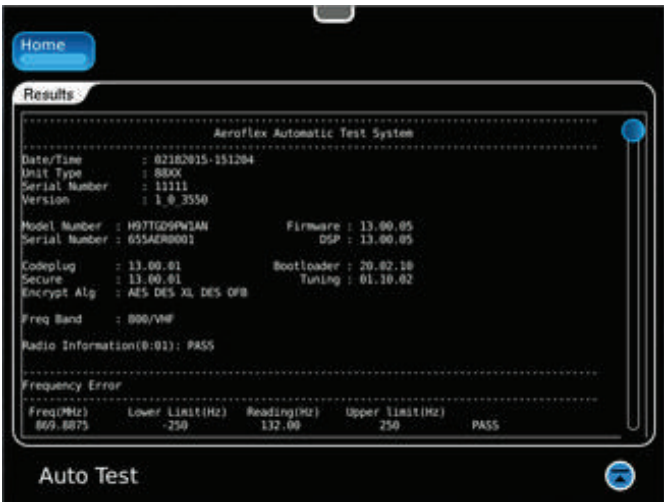Test results are automatically stored and can be exported through USB to an external PC for printing and for documentation purposes.



Test Results Summary

## Select 8800SX Accessories Overview

Item	Part Number	Description	Image
<b>Soft Case</b>	114478	The soft case allows full operation of the 8800SX while inside the case. The laptop style design is lightweight and provides extra protection during field operation. Storage pockets provide extra space for spare batteries, test cables, etc.	
<b>Hard Transit Case</b>	114477	The hard transit case features form-fitted slots for the 8800SX, protective cover, precision VSWR/DTF Kit, power supply, 150 W attenuators, spare battery, and more.	
<b>Precision DTF/ VSWR Accessory Kit</b>	114348	This accessory kit provides all items for accurate VSWR, Return Loss, and Distance-to-Fault measurement. The kit includes a case, return loss bridge, power divider, 50 $\Omega$ calibrator, and two N-type test cables specifically designed for the 8800SX.	
<b>Bird 5017D Wideband RF Power Sensor</b>	92793	The 8800SX also supports the Bird 5017D Wideband Power Sensor as an external power meter for users that already have the 5017D. This capability requires 8800OPT13 and provides simultaneous forward and reverse power measurements up to 500 W and VSWR measurements that are displayed on the 8800SX screen. Only compatible with units that do not have the internal wideband power sensor.	



## Ordering Information

### Versions and Options

Order Number	Description
142820	8800SX Radio Test Set
	<b>Standard Accessories</b>
	Fuse, 5 A, 32 V, Mini Blade
	Power Supply
	AC Power Cord
	AC Power Cord - China
	AC Power Cord - Europe
	AC Power Cord - UK
	Adapter, N(m) to BNC(f), Qty 3
	Front Cover
	Internal Battery
139942	8800SX Radio Test Set with Internal Wideband Power Sensor
	<b>Standard Accessories</b>
	Internal Bird 5017D Wideband Power Sensor
	Fuse, 5 A, 32 V, Mini Blade
	Power Supply
	AC Power Cord
	AC Power Cord - China
	AC Power Cord - Europe
	AC Power Cord - UK
	Adapter, N(m) to BNC(f), Qty 3
	Front Cover
	Internal Battery
<b>Options</b>	
113334	8800OPT01 DMR
140215	8800OPT06 DMR Repeater Test (Requires Opt01)
113335	8800OPT02 dPMR
113336	8800OPT03 NXDN
113337	8800OPT04 P25 Conventional
138895	8800OPT05 P25 Phase II (Requires Opt04)
113338	8800OPT09 ARIB T98
142131	8800OPT162 TETRA Base Station
113339	8800OPT10 Tracking Generator
113340	8800OPT11 Occupied Bandwidth

113342	8800OPT13 External Bird 5017D Wideband Power Sensor Support (Requires Power Sensor)
113343	8800OPT14 PTC
113344	8800OPT15 AAR Channel Plan
139836	8800OPT20 R&S Power Sensor Support (NRT-Z14)
139837	8800OPT21 SINAD Selectable Notch Filters
139838	8800OPT22 SNR Meter
142370	8800OPT30 Mission Test Package (Motorola)

### Auto-Test and Alignments

#### DMR Radios

138528	8800OPT104 Motorola MOTOTRBO Radio Series Auto-Test and Alignment Software (Requires Opt01)
139314	8800OPT108 Hytera DMR Series Auto-Test and Alignment Software (Requires Opt01 and Opt22)
139313	8800OPT109 Hytera DMR Repeater Auto-Test (Requires Opt01 and Opt108)
141179	8800OPT113 Tait DMR Series Auto-Test ONLY (Requires Opt01)

#### NXDN Radios

138525	8800OPT101 Kenwood NEXEDGE Series Auto-Test and Alignment Software (Requires Opt03)
--------	---

#### P25 Radios

139319	8800OPT114 BK Technologies KNG Series Auto-Test and Alignment Software (Requires Opt04)
139320	8800OPT115 EFJohnson Viking Series Auto-Test and Alignment Software (Requires Opt04)
139317	8800OPT111 L3Harris P25 Series Auto-Test and Alignment Software (Requires Opt04)
141180	8800OPT117 L3Harris XL Series Auto-Test and Alignment Software (Requires Opt04)
138526	8800OPT102 Kenwood 5x20 Series Auto-Test and Alignment Software (Requires Opt04)

140913	8800OPT118 Kenwood Viking 5/6/7000 Series Auto-Test and Alignment Software (Requires Opt04)
138527	8800OPT103 Motorola APX Series Auto-Test and Alignment Software (Requires Opt04)
140868	8800OPT128 Motorola APX 8000 Series Auto-Test and Alignment Software (Requires Opt04 and Opt103)
140900	8800OPT129 Motorola APX "B" Series Auto-Test and Alignment Software (Requires Opt04 and Opt103)
139315	8800OPT105 Motorola ASTRO® 25 XTS® / XTL™ Auto-Test and Alignment Software (Requires Opt04)
8800OPT130	8800OPT130 Motorola APX NEXT™ Series Auto-Test and Alignment Software (Requires Opt04 and Opt103)
139318	8800OPT112 Tait P25 Series Auto-Test ONLY (Requires Opt04)

#### **Multi-Protocol Radios**

141178	8800OPT107 Kenwood NX-3000 / 5000 Series Auto-Test and Alignment Software (Requires Opt01, Opt03, or Opt04 depending on radio digital technology selected)
--------	--

#### **Languages**

113356	8800OPT306 Arabic
113350	8800OPT300 Chinese (Simplified)
113351	8800OPT301 Chinese (Traditional)
113361	8800OPT311 French
113360	8800OPT310 German
139625	8800OPT312 Italian
113359	8800OPT309 Japanese
113355	8800OPT305 Korean
113354	8800OPT304 Malay / Indonesian
113357	8800OPT307 Polish
113358	8800OPT308 Russian
113352	8800OPT302 Spanish

#### **Optional Accessories**

114477	Case, Hard Transit
114478	Case, Soft-Sided Carrying
82556	Attenuator (6 dB / 150 W), 1.5 GHz
140227	Attenuator (40 dB / 2 W), 18 GHz Type N
67076	Battery, Spare, Internal
114479	8800 External Battery Charger
114348	8800 Precision DTF / VSWR Accessory Kit (Requires Opt10)
92793	External Bird 5017D Wideband Power Sensor (Requires Opt13)
114312	8800 Rackmount Kit
112861	8800 Microphone
114475	8800 Antenna Kit
62404	8800 DC Power Cord / Cigarette Adapter
63936	AC24009 DMM Test Leads
112277	10 Amp Current Shunt, 0.01 Ohm
67411	Scope Probe Kit
141707	8800 Balanced to Unbalanced Audio Adapter
63351	RF Cable for AutoAlignment (COAX ASSY, RG223,36.0,BNC,M,ST / BNC,M,ST)

#### **Care Plans**

8800-5	5 Yr Total HW Warranty + Standard Calibrations - SILVER-5
8800-3	3 Yr Total HW Warranty + Standard Calibrations - SILVER-3
8800-HWO	1 Yr Extended HW Warranty only BRONZE-2

#### **Calibration Certificates**

138313	8800 Calibration Certificate (ISO 9001)
--------	---