


OPERATING INSTRUCTIONS

- 1) INSTALL PCMCIA MEDIA (PN: 700-1679-00X), IF DOWNLOADING.
- 2) INSURE THAT NO POWER IS APPLIED TO THE FLIGHT RECORDER (CIRCUIT BREAKER IS OPEN).
- 3) CONNECT J1 OF CABLE TO THE HHDLU. CONNECT P1 TO THE RECORDER.
- 4) APPLY POWER TO THE FLIGHT RECORDER (CLOSE CIRCUIT BREAKER).
- 5) MOMENTARILY DEPRESS THE POWER PUSH BUTTON ON TOP OF HHDLU TO ENABLE POWER.
- 6) ONCE POWER IS ENABLED, 2 BARS WILL APPEAR ON THE DISPLAY WHILE THE SYSTEM BOOTS AND PERFORMS A SELF TEST.
- 7) APPROXIMATELY 30 SECONDS AFTER POWER IS APPLIED, THE HHDLU WILL COMPLETE SELF TEST AND DISPLAY THE OPERATING SYSTEM SOFTWARE PART NUMBER.
- 8) FOLLOW THE HHDLU MENU INSTRUCTIONS TO PERFORM THE DESIRED FUNCTION.
- 9) UPON COMPLETION REMOVE POWER FROM THE FLIGHT RECORDER, DISCONNECT THE CABLE, REMOVE THE PCMCIA MEDIA (IF INSTALLED) AND RETURN THE HHDLU, MEDIA AND CABLE TO THE CARRY BAG.

(OVER)

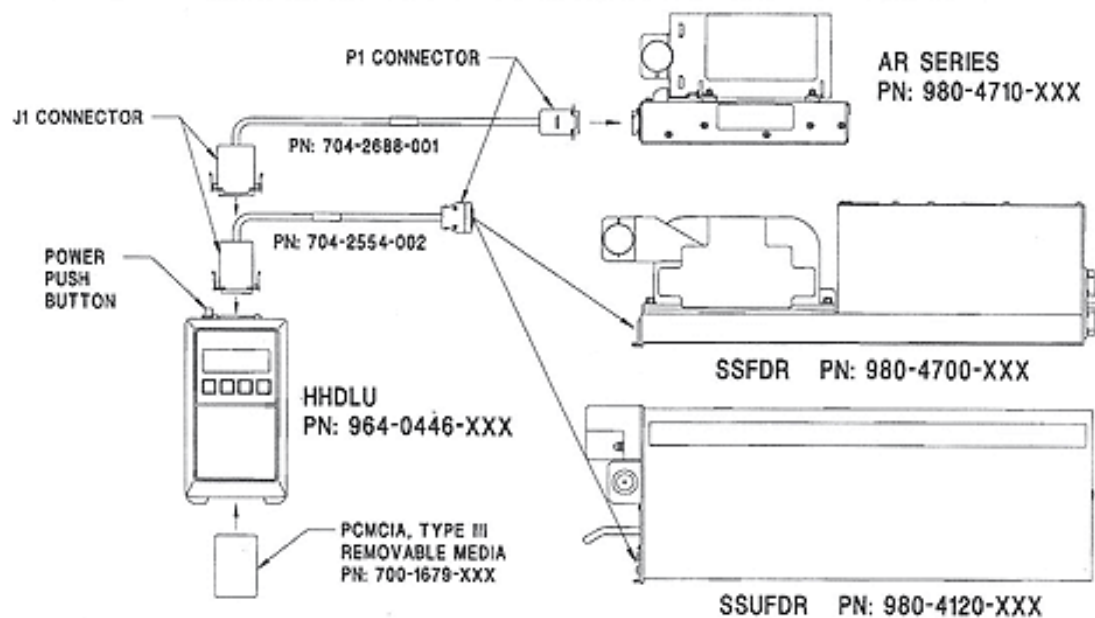

Honeywell

HONEYWELL INTERNATIONAL INC.
21111 N 19 AVE PHX, AZ USA