


## GNS-743A GPS/GLONASS SATELLITE SIMULATOR

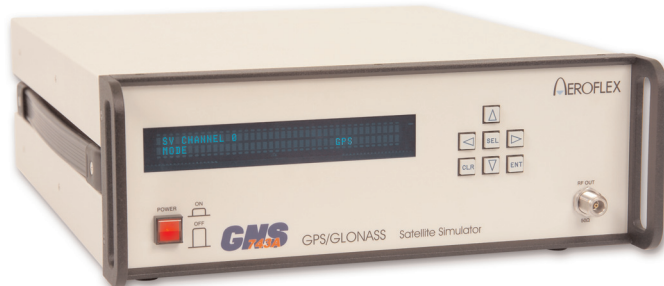

The answer to RF leakage, calibration and RF controllability problems in receiver test applications

- Simulation of any GPS or GLONASS (L1 frequency, K=1-24) satellite
- Low noise RF output from -158 dBm to -88 dBm
- User uploadable NAV data with dynamic z-count for exact satellite simulation
- User control of Doppler velocity, acceleration and jerk
- Outputs C/A code, code chip clock, epoch sync, NAV data and NAV data clock
- Complete technical manual provided with calibration and maintenance procedures
- Provision for external frequency reference
- Single channel or dual channel models available

The GNS-743A is a navigation satellite simulator capable of producing combined, code-synchronized GPS and GLONASS L1 C/A satellite RF signals. It is designed for precision production and engineering testing of GPS receivers, particularly those that must meet exacting certification requirements. Carrier-to-noise ratio, acquisition and tracking tests, pseudo-range measurements, inter-channel bias, and almanac downloading can be accomplished readily and cost effectively with this unit. Completely programmable for automated production testing, it is available in a single-channel or a dual-channel configuration. The dual-channel version (GNS-743A-2L) can simulate any combination of two GPS and/ or GLONASS space vehicles.

Each channel can be independently configured as a

GPS or a GLONASS space vehicle. The RF signals are summed and output to a single RF port. The design of the GNS-743A has produced a very low noise RF output with negligible RF leakage, enabling the output level to be held within  $\pm 1$  dB down to -158 dBm. It is calibrated to within  $\pm 0.5$  dB at -130 dBm. The instantaneous RF frequency is precisely controlled through advanced DDS (direct digital synthesis) techniques, allowing control of Doppler frequency, acceleration, and jerk to within 0.01 Hz. Pseudorange measurements are facilitated by the ability to enter, to within 1 ns, the delay of the C/A epoch relative to an internally generated or externally supplied 1 PPS sync pulse. Comprehensive calibration procedures, traceable to NIST, are provided in the maintenance manual.

### GENERAL SPECIFICATIONS

#### RF OUTPUT

##### GPS

1575.4200 MHz

##### GLONASS

1602.0000 MHz

+K X 0.5625 MHz, K=1 to 24

##### Frequency Stability

<(5 X 10<sup>-10</sup> / day drift rate)

##### Level

-158 to -88 dBm; controllable  
in 0.1 dB steps

##### Accuracy

$\pm 1.0$  dB RSS;  $\pm 0.5$  dB RSS @  
-130 dBm

##### VSWR

<1.25:1 @ 50 ohm output

## Spurious

<-35 dBc

## Harmonics

<-49 dBc

## RF CALIBRATION OUTPUT

### Nominal

-21 dBm

### Accuracy

+0.5 dB

### Code Outputs (GPS & GLONASS)

L1 C/A code, code chip clock and code epoch sync (TTL)

NAV data code and NAV data clock (TTL)

### Input Signals

External 10.00 MHz standard reference frequency source

External 1 PPS synchronization pulse

### Output Signals

10.00 MHz frequency reference source

1 PPS synchronization pulse

### CONTROLLABLE FUNCTIONS (via front panel or GPIB interface)

Space vehicle number

GPS or GLONASS mode

### Doppler frequency

±80 kHz (15000 m/s) in 0.01 Hz steps

### Acceleration

±1500 Hz/sec (± 285 m/sec<sup>2</sup> or

29.4g) in 0.01 Hz/sec steps

### Jerk

±1500 Hz/sec<sup>2</sup> (± 285 m/sec<sup>3</sup> or 29.4g/s) in 0.01 Hz/sec<sup>2</sup> steps

RF output level

C/A code modulation ON/OFF

NAV data modulation ON/OFF

GPIB address

Delay between 1 PPS sync & RF code modulation in 1 ns

increments

GPS Almanac via GPIB upload commands

GLONASS Almanac

## PHYSICAL CHARACTERISTICS

### Height

6.0 in (15.25 cm)

### Width

15.3 in (38.85 cm)

### Depth

17.5 in (44.45 cm)

### Weight

Single channel

25.4 lbs (11.5 kg)

Dual channel

31.9 lbs (14.5 kg)

### Operating Temperature

100°C to 350°C

### Input power

100 - 130 VAC

200 - 250 VAC

47 - 63 Hz

## VERSIONS AND ACCESSORIES

When ordering please quote the full ordering number information.

### ORDERING INFORMATION

#### Versions

GNS743A-1L-110 Single Channel Satellite Simulator (110V)

GNS743A-1L-220 Single Channel Satellite Simulator (220V)

GNS743A-2L-110 Dual Channel Satellite Simulator (110V)

GNS743A-2L-220 Dual Channel Satellite Simulator (220V)

Included:

Windows™ GUI Software for use with PC and National Instruments GPIB card.

### OPTIONAL ACCESSORIES

AC50057400

GNS 743A Rack Mount Kit

#### CHINA Beijing

Tel: [+86] (10) 6539 1166  
Fax: [+86] (10) 6539 1778

#### CHINA Shanghai

Tel: [+86] (21) 5109 5128  
Fax: [+86] (21) 5150 6112

#### FINLAND

Tel: [+358] (9) 2709 5541  
Fax: [+358] (9) 804 2441

#### FRANCE

Tel: [+33] 1 60 79 96 00  
Fax: [+33] 1 60 77 69 22

#### GERMANY

Tel: [+49] 8131 2926-0  
Fax: [+49] 8131 2926-130

#### HONG KONG

Tel: [+852] 2832 7988  
Fax: [+852] 2834 5364

#### INDIA

Tel: [+91] 80 5115 4501  
Fax: [+91] 80 5115 4502

#### KOREA

Tel: [+82] (2) 3424 2719  
Fax: [+82] (2) 3424 8620

#### SCANDINAVIA

Tel: [+45] 9614 0045  
Fax: [+45] 9614 0047

#### SPAIN

Tel: [+34] (91) 640 11 34  
Fax: [+34] (91) 640 06 40

#### UK Burnham

Tel: [+44] (0) 1628 604455  
Fax: [+44] (0) 1628 662017

#### UK Cambridge

Tel: [+44] (0) 1763 262277  
Fax: [+44] (0) 1763 285353

#### UK Stevenage

Tel: [+44] (0) 1438 742200  
Fax: [+44] (0) 1438 727601  
Freephone: 0800 282388

#### USA

Tel: [+1] (316) 522 4981  
Fax: [+1] (316) 522 1360  
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2006.

[www.aeroflex.com](http://www.aeroflex.com)  
[info-test@eroflex.com](mailto:info-test@eroflex.com)



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.