


# Avionics

## Option 25 Avionics option for the 2948B Low Phase Noise Communications Service Monitor

**AEROFLEX**  
A passion for performance.

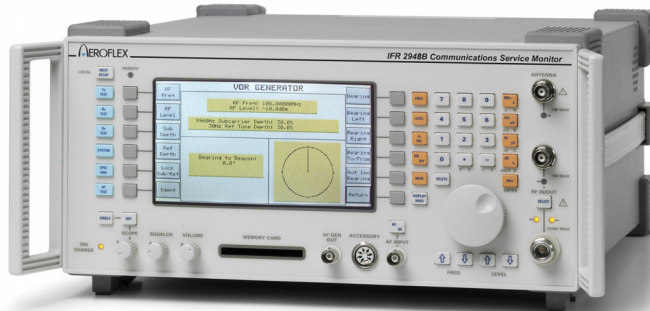

Communication and ramp testing of military and commercial aircraft in one instrument

- Avionics modes for ILS, VOR, marker beacons and SELCAL
- Displays in avionics terms: SDM, DDM, Bearing and TO and FROM
- Extensive pre-sets for avionics functions DDM and Bearing
- Auto-increment of VOR Bearing for aircraft display testing
- DC operation from aircraft power supplies or batteries
- Avionics testing in both Direct and 'Off Air' configurations

*The datasheet covers only the specific option 25 Avionics capability. For full details of the 2948B host platform functionality and capabilities refer to the 2948B data sheet 46891/212.*

*Aeroflex is a leader in the design, manufacture and marketing of Avionics test systems.*

*The 2948B Communications Service Monitor is the lightest, most rugged service monitor available with a full performance spectrum analyzer as standard. For field work, the 2948B provides an excellent combination of instruments for all types of maintenance work. In the workshop, it provides all of the performance you would expect for exacting measurements.*

### AVIONICS (OPTION 25)

Enables communication and ramp testing of military and commercial aircraft in one instrument.

The option provides an impressive range of features for the aircraft and avionics maintenance industry.

In addition to the features provided by the general purpose 2948B, the dedicated Avionics system provides signals for testing the following: ILS receivers for localizer, glidescope (including identification and markers), VOR beacon receivers with identification, and SELCAL selective calling receivers.

The 2948B screen gives a representation of the aircraft's display in each mode, with the effective test signal parameters clearly indicated both diagrammatically and numerically.

### SPECIFICATION

#### Avionics Systems

*The Avionics feature provides amplitude modulated signals suitable for testing of Instrument Landing Systems (ILS) and VHF Omnidirectional Radio Range (VOR) receivers.*

#### ILS MODE

##### Sum of Depth of Modulation (SDM)

*0% to 90% glideslope, 0% to 50% localizer in 0.1% steps representing the arithmetic sum of each tone depth*

##### Selection

*Keyboard entry*

##### Accuracy of SDM

*±5% of setting for carrier frequencies up to 400 MHz*

### Difference of Depth of Modulation (DDM)


0% to 45% glideslope, 0% to 25% localiser in 0.1% steps limited by SDM

### Selection

Keyboard entry and variation of rotary control

### Localiser Presets

0%, 4.6%, 9.3% and 15.5% DDM

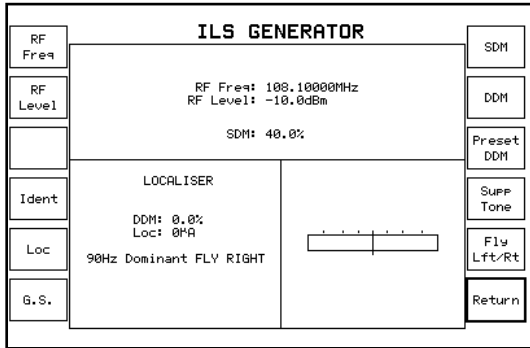

### Glideslope Presets

0%, 4.5%, 9.1% and 17.5% DDM

### Accuracy of DDM

0.001 DDM (20% depth) at 0 dBm

### Tone Frequencies

90 Hz and 150 Hz (either tone can be suppressed)

### Additional Modulation

1020 Hz ident signal available on 0 DDM on ILS from an internal modulation source

### VOR MODE

9.96 kHz Sub-Carrier Range


0.0% - 99.0% in 0.1% steps

### Modulation

FM by a 30 Hz tone with 480 Hz deviation

### 30 Hz Tone Range

0.0% to 99.0% in 0.1% steps

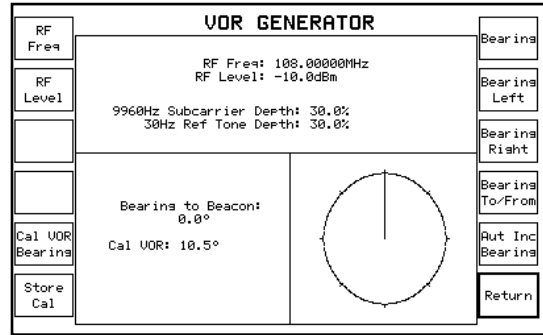

### Bearing Control

Relative phase of the 30 Hz tone and sub-carrier modulation adjustable from 0 to 360° in 0.1° steps by entering VOR bearing. Bearing can be entered as TO or FROM the beacon.

### Automatic VOR Test

Bearing automatically increments in 0.1° steps

### Bearing Accuracy

±0.5°

### Additional Modulation

Ident signal (1020 Hz) available on 0° bearing from an internal source

### SELCAL MODE

Provides amplitude modulation with SELCAL tones

### Data Entry

By table selection of 2 pairs of characters labeled 'A' to 'S'

### Timing

1 s tone duration, 250 ms gap

### MARKER BEACON MODE

Provides default modulation of 95% AM depth on a 75 MHz carrier at the rate of 400 Hz (outer beacon), 1.3 kHz (middle beacon) or 3 kHz (inner beacon). AM depth, carrier frequency and modulation frequencies can be changed from default values.

#### CHINA Beijing

Tel: [+86] (10) 6467 2761 2716  
Fax: [+86] (10) 6467 2821

#### CHINA Shanghai

Tel: [+86] (21) 6282 8001  
Fax: [+86] (21) 62828 8002

#### FINLAND

Tel: [+358] (9) 2709 5541  
Fax: [+358] (9) 804 2441

#### FRANCE

Tel: [+33] 1 60 79 96 00  
Fax: [+33] 1 60 77 69 22

#### GERMANY

Tel: [+49] 8131 2926-0  
Fax: [+49] 8131 2926-130

#### HONG KONG

Tel: [+852] 2832 7988  
Fax: [+852] 2834 5364

#### INDIA

Tel: [+91] 80 5115 4501  
Fax: [+91] 80 5115 4502

#### KOREA

Tel: [+82] (2) 3424 2719  
Fax: [+82] (2) 3424 8620

#### SCANDINAVIA

Tel: [+45] 9614 0045  
Fax: [+45] 9614 0047

#### SPAIN

Tel: [+34] (91) 640 11 34  
Fax: [+34] (91) 640 06 40

#### UK Burnham

Tel: [+44] (0) 1628 604455  
Fax: [+44] (0) 1628 662017

#### UK Stevenage

Tel: [+44] (0) 1438 742200  
Fax: [+44] (0) 1438 727601  
Freephone: 0800 282388

#### USA

Tel: [+1] (316) 522 4981  
Fax: [+1] (316) 522 1360  
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2005.

www.aeroflex.com  
info-test@ aeroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.