



SDR-OMNI ALL-IN-ONE Avionics Test Set

SDR-OMNI Avionics Flight Line Test Set

The SDR-OMNI provides the avionics technician with a comprehensive suite of RF test capabilities in a single ruggedized, yet lightweight, package for demanding commercial and military customers.

The unit has a highly readable and responsive touchscreen for quick and convenient avionics testing – especially for performing FAA required ATC transponder, ADS-B, and ELT tests. Professionally formatted reports can be downloaded via USB or wirelessly printed to a local wireless printer.

Test functionality:

- **Transponder and FAA Part 43**
- **ADS-B 1090 and 978 UAT (IN and OUT), FIS-B**
- **VOR and ILS (with combined LOC + GS + MB)**
- **HF / VHF / UHF COMM Radios (AM & FM)**
- **SELCAL**
- **ELT / EPIRB**
- **Aircraft Audio Systems (audio distortion)**
- **VSWR / Distance to Fault (DTF) / Cable Loss**
- **TCAS and DME**
- **2-Year Calibration Cycle**

This is the most advanced test set ever made by TIC. The combination of hardware and software can test virtually any RF signal from 200 kHz to 1.6 GHz. As the lightest ruggedized tester on the market, the SDR-OMNI offers unmatched capability and ease of use.

Test functions are implemented using software-defined signal processes that generate, receive, and measure complex avionics signals covering narrow band analog or digital communications, complex navigation, and wide-band pulse or data protocols.



SDR-OMNI All-In-One Avionics Test Set
P/N 90 000 147

- **Class 1 MIL-SPEC ruggedness**
- **Color Display with Responsive Touchscreen**
- **Intuitive, Smartphone-style user interface**
- **GPS receiver for accurate ADS-B testing**
- **Self-guided Calibration Verification**
- **Long lasting Li-ion battery**
- **Transponder Antenna Coupler included**
- **Audio TX/RX headset included**
- **Complete accessory kit for all applications**

**“Mission Critical RF
TESTING Solutions”**

SDR-OMNI


CURRENT RELEASE

- **TRANSPONDER 1030/1090 MHz:** Automated FAR Part 43 Appendix F transponder test for ATCRBS and Mode S Transponders; EHS, GICB BDS registers, Manual testing (power, freq., % reply, SLS, etc.)
- **1090 MHz ADS-B OUT:** Decoded BDS registers and FAR 91.227 / AC60-165B required data
- **1090 MHz ADS-B IN:** 4 simulated traffic targets for cockpit display verification
- **978 MHz UAT OUT:** Decoded display of all required data
- **978 MHz UAT IN:** 4 simulated traffic targets, FIS-B weather test
- **TCAS I & II, ACAS**
- **VOR & ILS:** Tests VOR receivers & ILS landing systems (simultaneous GS + LOC + MB)
- **DME**
- **COMM Radios:** HF / VHF / UHF COMM AM/FM Transceivers: Transmit and receive RF power, sensitivity, modulation, **voice test of aircraft radio using included headset**
- **ELT (406 MHz + 121.5/243 MHz) EPIRB/PLB testing**
- **SELCAL:** Test Selective Calling systems
- **RF CABLE & ANTENNA Test:** VSWR and DTF (Distance-to-Fault) for on-aircraft troubleshooting (VSWR calibration fixture included), Cable loss measurement
- **CALIBRATION VERIFICATION:** Guided calibration verification program

RELEASE 2 (1st QTR 2024)

- **GPS SIMULATOR:** Multi-satellite L1 C/A GPS signal for position and aircraft movement simulation

| SDR-OMNI CONFIGURATION AND ACCESSORIES | |
|---|----------------|
| Test Capability Included | SDR ALL IN ONE |
| ATCRBS & Mode S Transponder | ■ |
| TCAS I/II | ■ |
| 978 MHz UAT IN/OUT + FIS-B | ■ |
| 1090 MHz ADS-B IN/OUT | ■ |
| VSWR & DTF/Cable Loss | ■ |
| NAV VOR/LOC/GS/MB | ■ |
| DME | ■ |
| HF / VHF / UHF COMM – AM & FM | ■ |
| ELT/EPIRB 406 MHz + 121.5 / 243 MHz | ■ |
| SELCAL | ■ |
| Accessories Included | |
| Hard Transit Case | ■ |
| TAP-OMNI Antenna Coupler | ■ |
| VSWR/DTF Calibration Bridge and Cables | ■ |
| Antenna L-Band Directional | ■ |
| Antenna VOR/ILS/Comm - Telescopic | ■ |
| Antenna WiFi & GPS | ■ |
| Direct Connect Cables (3 and 10 meters) | ■ |
| RF Connector Adapter Kit | ■ |
| AC/DC Charger and Power Cord | ■ |
| Kick Stand | ■ |
| Standard 2 Year Warranty | ■ |

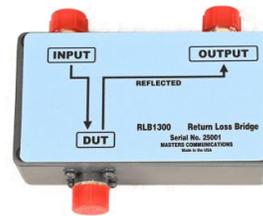

SDR-OMNI

SDR-OMNI SPECIFICATIONS

| Power Specifications | |
|--------------------------|---|
| Battery | Lithium Ion 7.4 V; 7800 mAh |
| Duration – fully charged | > 3 Hours Continuous 10 hrs @ 20% Duty Cycle |
| AC Input voltage | 100 to 240VAC 50/60/400 Hz |
| DC Input voltage | 12...28 VDC, 3.33 A (max) |
| Operating Temperature | -40°C to +55°C |
| Storage Temperature | -40°C to +70°C |

| Physical Characteristics | |
|--------------------------|-------------------------|
| Case Style | MIL-PRF-28800F, Class 1 |
| Height | 9.45" (24 cm) |
| Width | 7.1" (18.03 cm) |
| Depth | 2.25" (5.7 cm) |
| Weight Static | 4.2Lbs. (1.9 kg) |
| Touch Screen | Capacitive |



TAP-OMNI Transponder Antenna Coupler

The Antenna Coupler is included with the SDR-OMNI Transponder Test package. It can be hung on the top antenna or securely clamped to the bottom antenna.




- > 20dB shielding
- Ensures FAA compliance
- Solves multi-path issues in congested hangars
- Light weight and easy to use
- Ensures repeatable results
- Fits both "L" Type and Post antennas



SDR-OMNI

VOR / ILS / DME Testing
Easy to use -- graphic interface simulates the anticipated aircraft displays. Quick and precise on-aircraft testing

ADS-B OUT Testing
Quick and easy verification of all 1090 MHz BDS registers and 978 MHz UAT Message elements

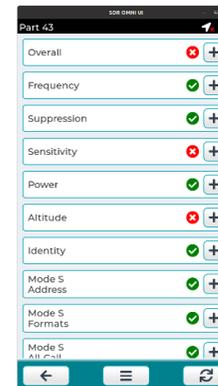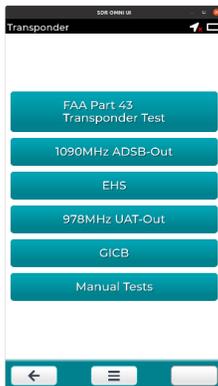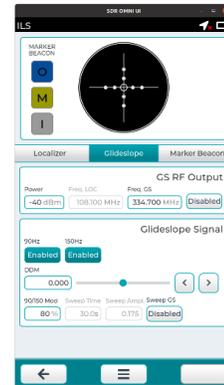




ATC Transponder Testing

Rapid, automated FAR Part 43 Appendix F required ATC testing with easy-to-read test results. Save / print PDF report for documentation.

COMMUNICATIONS

Complete control of all aspects of the audio, modulation, RF output.

Detailed results of received signal (power, frequency, modulation).

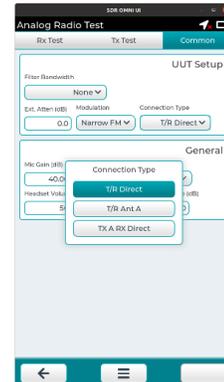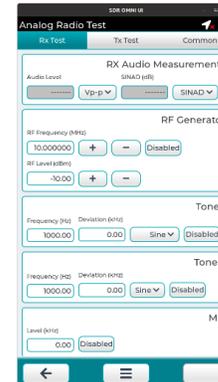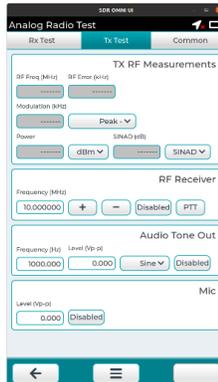

Mission Critical RF TEST Solutions

Tel-Instrument Electronics Corp.



Product specifications and descriptions in this document are subject to change without notice.